

DABLIUTOUCH

Mod. E1M | PREMIUM

4K ULTRAHD



SCAN ME

Android 15



16 GB



256 GB



65" | 75" | 86" | 98"

Google EDLA

Display

| | |
|-----------------|--------------------------------|
| Screen Type | TFT LCD |
| Aspect Ratio | 16:9 |
| Viewing Angle | 178° |
| Resolution | 4K UHD (3840 × 2160 @ 60 Hz) |
| Back Light Unit | DLED OD20 |
| Color Gamut | DCI-P3 92% QLED |
| Response Time | ≤ 6.5 milliseconds or less |
| Refresh Rate | 60Hz |
| Display Color | 1.07Billion |
| Glass Hardness | 9H (pencil), 7 (Mohs) |
| Glass Type | AG Anti-bacterial Glass 3mm |
| Bonding Type | Zero bonding |

Computing

| | |
|------------------|--|
| Operating System | Android™15 |
| RAM | 16GB |
| ROM | 256GB |
| Chip | RK3588 |
| CPU | A76*4+A55*4 |
| GPU | G610 MC4 |
| OTA | Yes |
| OSD | German, English, Spanish, French, Italian, Hungarian, Croatian, New Zealand language, Arabic, Russian.10 languages |

Sensor

| | |
|--------|---|
| NFC | 1 |
| PM 2.5 | 1 |

Interactivity

| | |
|-------------------|---|
| Touch Points | 50 |
| Touch Technology | IR |
| Touch Accuracy | 0.5 mm |
| Max T. Resp. Time | 3,3 milliseconds |
| Tracking Rate | ≥2.5 m/s |
| ScanRate | 300 Hz |
| Pen Type | Battery-less |
| Pen Holder | yes |
| Pen Identities | 3 mm |
| Touch Hight | 1.5mm |
| Compatibility* | Windows® 7-10 OS X® 10.8 to 10.11 macOS® Sierra 10.12.1® or later Linux® Ubuntu® 18.04 LTS Chrome OS™ |

Interface (Front)

| | |
|----------------|---|
| Type C PD 100w | 1 |
| USB 3.0 | 3 |
| Touch USB 2.0 | 1 |
| HDMI-IN 2.0 | 1 |

Included accessories

Pen x2 , remote control x1, wall mount x1, power cable x1, manual x1, Usb touch cable x1,HDMI cable x1, Type C cable x1, NFC card x2

Optional module OPS

(120 × 180 × 30 mm)

Interface (Rear)

| | |
|----------------|---|
| USB3.0 | 2 |
| USB2.0 | 1 |
| Touch USB3.0 | 2 |
| Type C PD 15w | 1 |
| DP IN | 1 |
| HDMI IN 1.4 | 1 |
| HDMI IN 2.0 | 2 |
| RS232 | 1 |
| RJ45 1000M | 2 |
| HDMI OUT | 1 |
| SPDIF | 1 |
| Line OUT | 1 |
| Mic IN | 1 |
| Micro-SD card | 1 |
| OPS slot 80pin | 1 |

Environmental

| | |
|-----------------------|------------|
| Operating Temperature | 0°C- 40°C |
| Storage Temperature | -20°C-60°C |
| Operating Humidity | 20%-80%RH |
| Storage Humidity | 20%-80%RH |

Audio

| | |
|---------|--------------------------------------|
| Speaker | Face to front |
| Power | Tweeter 2×20W Subwoofer 1×20 watt |

WIFI & Bluetooth

Dual WIFI6+WIFI5+BT5.2

65"

Cod. E1M-L156Y

| | | | | |
|-----------------------|------------------------|------------------------|-----------------------------|------------------------|
| Display Area | 1432 × 815 mm | 1651 × 928 mm | 1895 × 1065 mm | 2172 × 1229 mm |
| Contrast Ratio | 5000:1 | 5000:1 | 4000:1 | 5000:1 |
| Brightness(typ) | 450 cd/m2 | 450 cd/m2 | 450 cd/m2 | 450 cd/m2 |
| Dimensions | 1489 × 897.9 × 85 mm | 1710 × 1022 × 85 mm | 1953.74 × 1159.41 × 88.1 mm | 2219 × 1312 × 106 mm |
| Pack Dimensions | 1657 × 185 × 1007 mm | 1873 × 1134 × 202 mm | 2110 × 222 × 1270 mm | 2385 × 375 × 1576 mm |
| Wall-hanging Screw | M8×20mm | M8×20mm | M8×20mm | M8×20mm |
| Net Weight | 31.6 KG | 43.55 KG | 55.82 KG | 94.4 KG |
| Gross Weight | 42.12 KG | 57.4 KG | 71.88 KG | 140.2 KG |
| VESA | 600 × 400 mm | 800 × 400mm | 800 × 600mm | 1000 × 400 mm |
| Requirements | 100-240V 50/60Hz 4.84A | 100-240V 50/60Hz 5.25A | 100-240V 50/60Hz 6.27A | 100-240V 50/60Hz 7.49A |
| Consumption (Max) | 484 W | 525 W | 627 W | 749 W |
| Consumption (Standby) | ≤0.5W | ≤0.5W | ≤0.5W | ≤0.5W |

75"

Cod. E1M-L157Y


86"

Cod. E1M-L158Y

98"

Cod. E1M-L159Y


Technical drawings

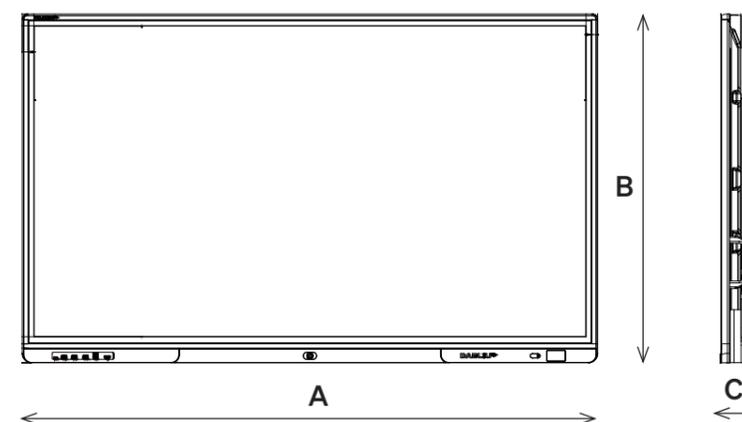

65"
mm

75"
mm

| | | |
|---|--------|--------|
| A | 1487.2 | 1708,9 |
| B | 897 | 1021.7 |
| C | 87.8 | 87,9 |
| D | 443.6 | 454.5 |
| E | 600 | 800 |
| F | 443.6 | 454.5 |
| G | 290.2 | 212.5 |
| H | 400 | 400 |
| I | 206.8 | 409.2 |

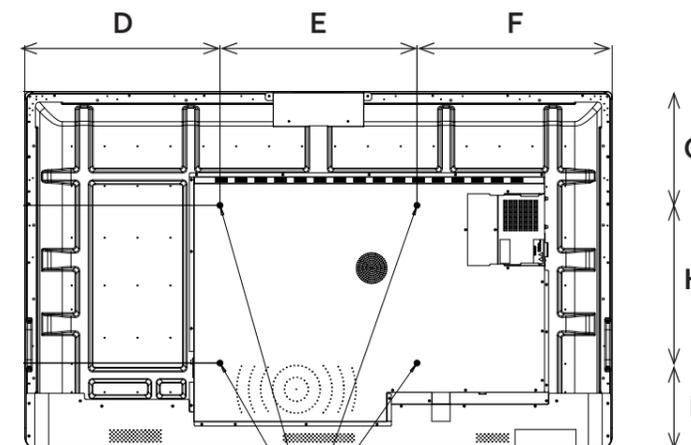

86"
mm

98"
mm

| | | |
|---|--------|--------|
| A | 1953,7 | 2216,8 |
| B | 1159,4 | 1311,4 |
| C | 88.2 | 106 |
| D | 576.9 | 608.4 |
| E | 800 | 1000 |
| F | 576.9 | 608.4 |
| G | 305.8 | 629.6 |
| H | 600 | 400 |
| I | 253.6 | 281.8 |

© 2025 Wacebo. All rights reserved.

The content of this document, including images, texts, specifications, and layouts, is the property of Wacebo and is protected by applicable intellectual property laws. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Wacebo. Product specifications and features are subject to change without notice.